

联系电话：13681906406


束先生

储气罐

储气罐基本参数

序号	容积 (m³)	压力 (MPa)	温度 (°C)	内径 Ø1	总高 H ₁	进气口 a H ₂	出气口 b H ₃	支座(3只) Ø2 Q3	排污阀	配套空压机 容量m³/min
1	0.3	0.8	100	550	1766	$\frac{65}{11/2}$	667	400	20	2.5-3
2	0.3	1.0	100	550	1766	$\frac{65}{11/2}$	667	400	20	2.5-3
3	0.3	1.3	100	550	1768	65	668	400	20	2.5-3
4	0.3	1.6	100	550	1768	65	668	400	20	2.5-3
5	0.5	0.8	100	600	2100	$\frac{65}{11/2}$	680	420	20	4-5
6	0.5	1.0	100	600	2100	$\frac{65}{11/2}$	680	420	20	4-5
7	0.5	1.3	100	600	2100	65	606	420	20	4-5
8	0.5	1.6	100	600	2100	65	606	420	20	4-5
9	0.6	0.8	100	650	2138	$\frac{80}{2}$	694	470	20	4.8-6
10	0.6	1.0	100	650	2138	$\frac{80}{2}$	694	470	20	4.8-6
11	0.6	1.3	100	650	2138	65	694	470	20	4.8-6
12	0.6	1.6	100	650	2138	65	694	470	20	4.8-6
13	1	0	100	800	2406	$\frac{80}{2}$	800	560	24	8-10
14	1	1.0	100	800	2406	$\frac{80}{2}$	800	560	24	8-10
15	1	1.3	100	800	2406	80	800	560	24	8-10
16	1	1.6	100	800	2406	80	800	560	24	8-10
17	1.5	0	100	950	2538	80	769	670	24	12-15
18	1.5	1.0	100	950	2538	80	769	670	24	12-15
19	1.5	1.3	100	950	2538	80	769	670	24	12-15
20	1.5	1.6	100	950	2538	80	769	670	24	12-15
21	2	0.8	100	1100	2702	80	856	770	24	16-20
22	2	1.0	100	1100	2702	80	856	770	24	16-20
23	2	1.3	100	1100	2702	80	856	770	24	16-20
24	2	1.6	100	1000	3070	100	850	700	24	16-20
25	3	0.8	100	1300	2802	100	906	950	24	24-30
26	3	1.0	100	1300	2802	100	906	950	24	24-30
27	3	1.3	100	1300	2802	100	906	950	24	24-30
28	3	1.65	100	1300	2810	150	910	950	24	24-30
29	4	0.8	100	1500	2902	150	956	1100	30	32-40
30	4	1.0	100	1500	2902	150	956	1100	30	32-40
31	4	1.3	100	1500	2902	150	956	1100	30	32-40
32	4	1.6	100	1500	2902	150	956	1100	30	32-40
33	5	0.8	100	1400	3752	150	930	1050	24	40-50
34	5	1.0	100	1400	3950	150	1010	1050	24	40-50
35	5	1.3	100	1400	3880	150	940	1050	24	40-50
36	5	1.6	100	1400	3790	150	965	1050	24	40-50
37	6	0.8	100	1400	4452	150	930	1050	24	48-60
38	6	1.0	100	1400	4550	150	960	1050	24	48-60
39	6	1.3	100	1400	4452	150	930	1050	24	48-60
40	6	1.6	100	1400	4452	150	930	1050	24	48-60
41	8	0.8	100	1600	4560	150	990	1200	30	64-80
42	8	1.0	100	1600	4556	150	973	1200	30	64-80
43	8	1.3	100	1600	4556	150	973	1200	30	64-80
44	10	0.8	100	2000	3766	150	1083	1500	30	80
45	10	1.0	100	2000	3800	150	1100	1500	30	80
46	12	0.8	100	2000	4446	125	1098	1500	30	80
47	12	1.0	100	2000	4500	125	1100	1500	30	80

注：1. 容积压力大于本表范围的可以另议价格。 2. 安全阀通径根据配套空压机容量计算得来。 3. 以上数据仅供参考
* 友情提示：安装时请注意不可靠近燃气管道及通风口

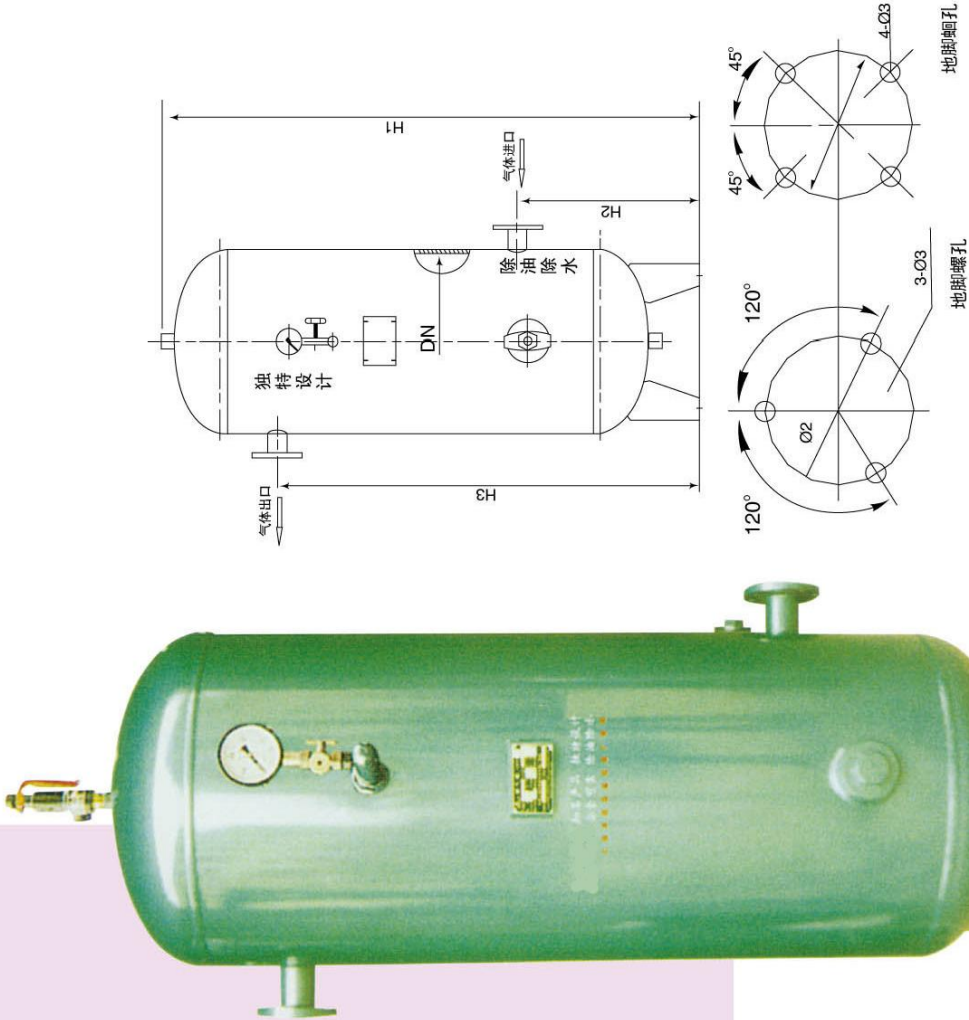

注：直径1400以上为4孔

<http://www.fsair.cn>